



Flitch conveyor system

SLC-25Y / SLC-35Y

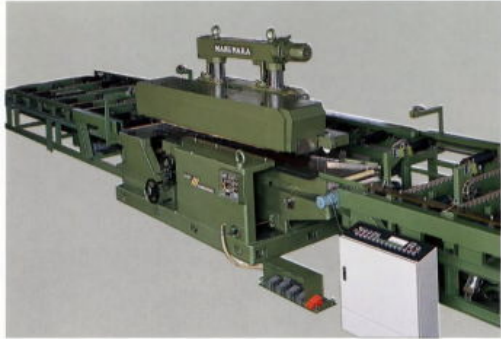

SPECIFICATION	
Flitch length	2,000 ~ 4,000 mm
Flitch height	Max 240mm
No of flitch	1 ~ 4
Lengthways feed speed	60 m/min (standard)
Side feed speed	30 m/min (standard)
FEATURE	
<ul style="list-style-type: none"> • For thin veneer slicer • Including veneer outfeed conveyor • Rubber roller & Plastic chain for protect flitch • Lengthways & side feed speed is changeable according to the slicer and number of flitches. 	

SLC-25TY / SLC-35TY

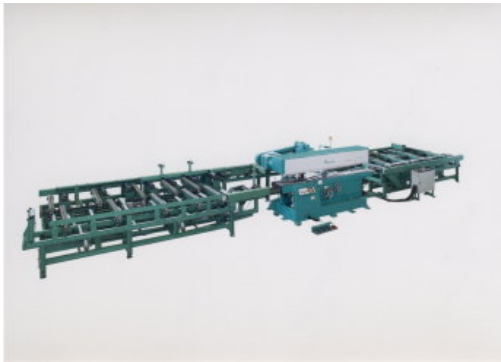

SPECIFICATION	
Flitch length	2,000 ~ 4,000 mm
Flitch height	Max 250mm
No of flitch	1 ~ 4
Lengthways feed speed	60 m/min (standard)
Side feed speed	30 m/min (standard)
FEATURE	
<ul style="list-style-type: none"> • For thick veneer slicer • Including veneer outfeed conveyor • Rubber roller & plastic chain for protect flitch • Lengthways & side feed speed is changeable according to the slicer and number of flitches. 	